




機械軸封 UB (短腳) EB520

Mechanical Seal



適用範圍 Service range	
溫度 Temperature	-20 ~ 100 °C
壓力 Pressure	-700mmHg~7kg/cm ² G

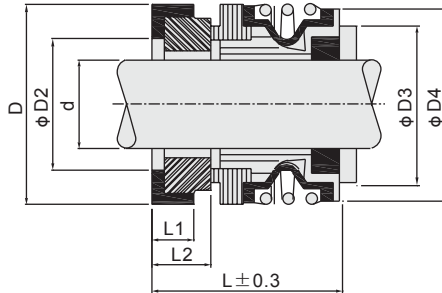

材質 Material : SUS+NBR

單位 unit: mm

CNL 編號 Parts No.	軸徑 d	孔徑 D	D2	D3	D4	高度 L	溝槽 L1	導角長 L2
UB-3/8"	9.525	22.225	14.3	17.42	23.8	22.225	6.35	4.76
UB-1/2"	12.7	25.4	17.45	20.625	26.97	22.8	6.35	4.76
UB-5/8"	15.875	31.75	20.625	23.8	30.937	30.124	10.287	8.712
UB-3/4"	19.05	34.925	23.8	26.97	34.112	30.124	10.287	8.712
UB-1"	25.4	41.275	30.15	33.325	42.85	31.725	11.1	9.525






機械軸封 UD

Mechanical Seal



適用範圍 Service range	
溫度 Temperature	-20 ~ 100 °C
壓力 Pressure	-500mmHg~3kg/cm ² G



用途：汽車引擎冷卻水灌溉用、
高速用之Pump

材質 Material : SUS+NBR

單位 unit: mm

CNL 編號 Parts No.	軸徑 d	孔徑 D	D2	D3	總高度 D4	D5	高度 L	溝槽 L1	導角長 L2
UD-13	13	25	14	14.2	28.55	31.7	10.2	5	8
UD-17	17	31	18	18.2	36.45	41.3	11.8	5	8
UD-20	20	35	21	21.4	40	43.7	11	5	9.5
UD-25	25	44	29	26.4	47	51	15	7	10
UD-30	30	48	32	31	52	57	16	8	11